



C04 SERIES



Model:	C04-24V-3528-144		Available Color	
Input Voltage:	24V DC	2200K- 280lm	Green	214.5lm
Power/m:	5W (15-12-7-5) WATT on request	2500K- 280lm	Blue	39.6lm
Working Mode:	PWM CV	2700K- 320lm	Pink	360lm
LED Type:	SMD3528	3000K- 330lm	Red	69.3lm
LED Qty /m:	144pcs	3500K- 335lm	Amber	90lm
Cutting Unit:	12LEDs	4000K- 340lm	Orange	80lm
Cutting Length:	5cm	5000K- 340lm	RGB	323.4lm
Max Length Single Feed:	32.8'/10m	5700K- 355lm		
IP	68	6500K- 370lm		

Lumen Maintenance:70,000 Hours L70@ 25°C



Material:
PVC/Silicon Optional



Waterproof rating
IP68



Beam Angle
120°



Min. Bending
80mm



Installation Temp.
0°C-55°C



Ambient Temp.
-25°C-55°C




Max Weight:
0.40kg/m



Dimmable:
DALI, 0-10V, DMX, Triac

WAVE

C01 SERIES

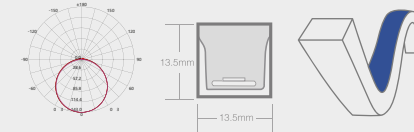

Model:	C01-24V-2835-144	Available Color		
Input Voltage:	24V DC	2200K-410lm	Green	440lm
Power/m:	10W	2500K-410lm	Blue	70lm
Working Mode:	PWM CV	2700K-410lm	Red	140lm
LED Type:	SMD2835	3000K-410lm		
LED Qty / meter:	144pcs	3500K-430lm		
Min. Cutting Unit:	12LEDs	4000K-430lm		
Min. Cutting Length:	8.33cm	5000K-460lm		
Max Length Single Feed:	32.8'/10m	5700K-460lm		
IP	68	6500K-460lm		

Lumen Maintenance: 70,000 Hours L70@ 25°C



Material:
PVC/Silicon Optional



Waterproof rating
IP68



Beam Angle
120°



Min. Bending
80mm



Installation Temp.
0°C-55°C



Ambient Temp.
-25°C-55°C



Max Weight:
0.40kg/m



Dimmable:
DALI, 0-10V, DMX, Triac

WAVE