




ULTRA 150

602001

Technical features

IP68 IK10 CE 3 YEARS WARRANTY

Underwater projector, Fountain ring .
 Completely made in stainless steel
 AISI 304 L Stainless steel 316 L on request
 Silicon rubber gasket , with 15 Lumileds
 LUXEON LED .

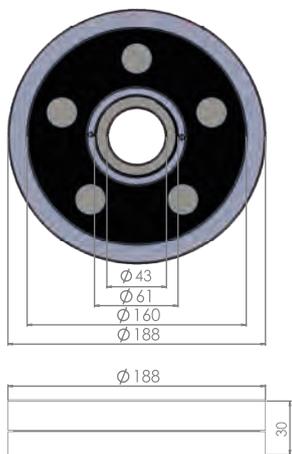

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
°3000K warm-white			
high-power led	°10	2904	132
high-power led	°30	2684	122
°4000K neutral-white			
high-power led	°10	3124	142
high-power led	°30	3014	137
°6000K cool white			
high-power led	°10	3124	142
high-power led	°30	3014	137

Technical data

Wattage	22 WATT
Voltage	12:24 V D.C
IP Rating	IP68 – 5 METERS DEPTH
IK Rating	IK10
Material	Completely made in stainless Steel AISI 304 L marine grade (or 316 on request)
Trim	stainless Steel AISI 304 L marine grade
Light source	15 high power led LUMILEDS -LUXEON
Screws	stainless steel
Gasket	silicone rubber
Lens	PC
Cable gland	M12 made in stainless steel AISI 304
Power cable	3 mt. (NEXANS, HAR) power cable included standard or custom lengthon request
Light distance	16 meter

Available color

RGB RGB-W RGB-NW RGB-ww BLUE ROYAL BLUE


Light beam available



Finish color options:

Stainless Steel



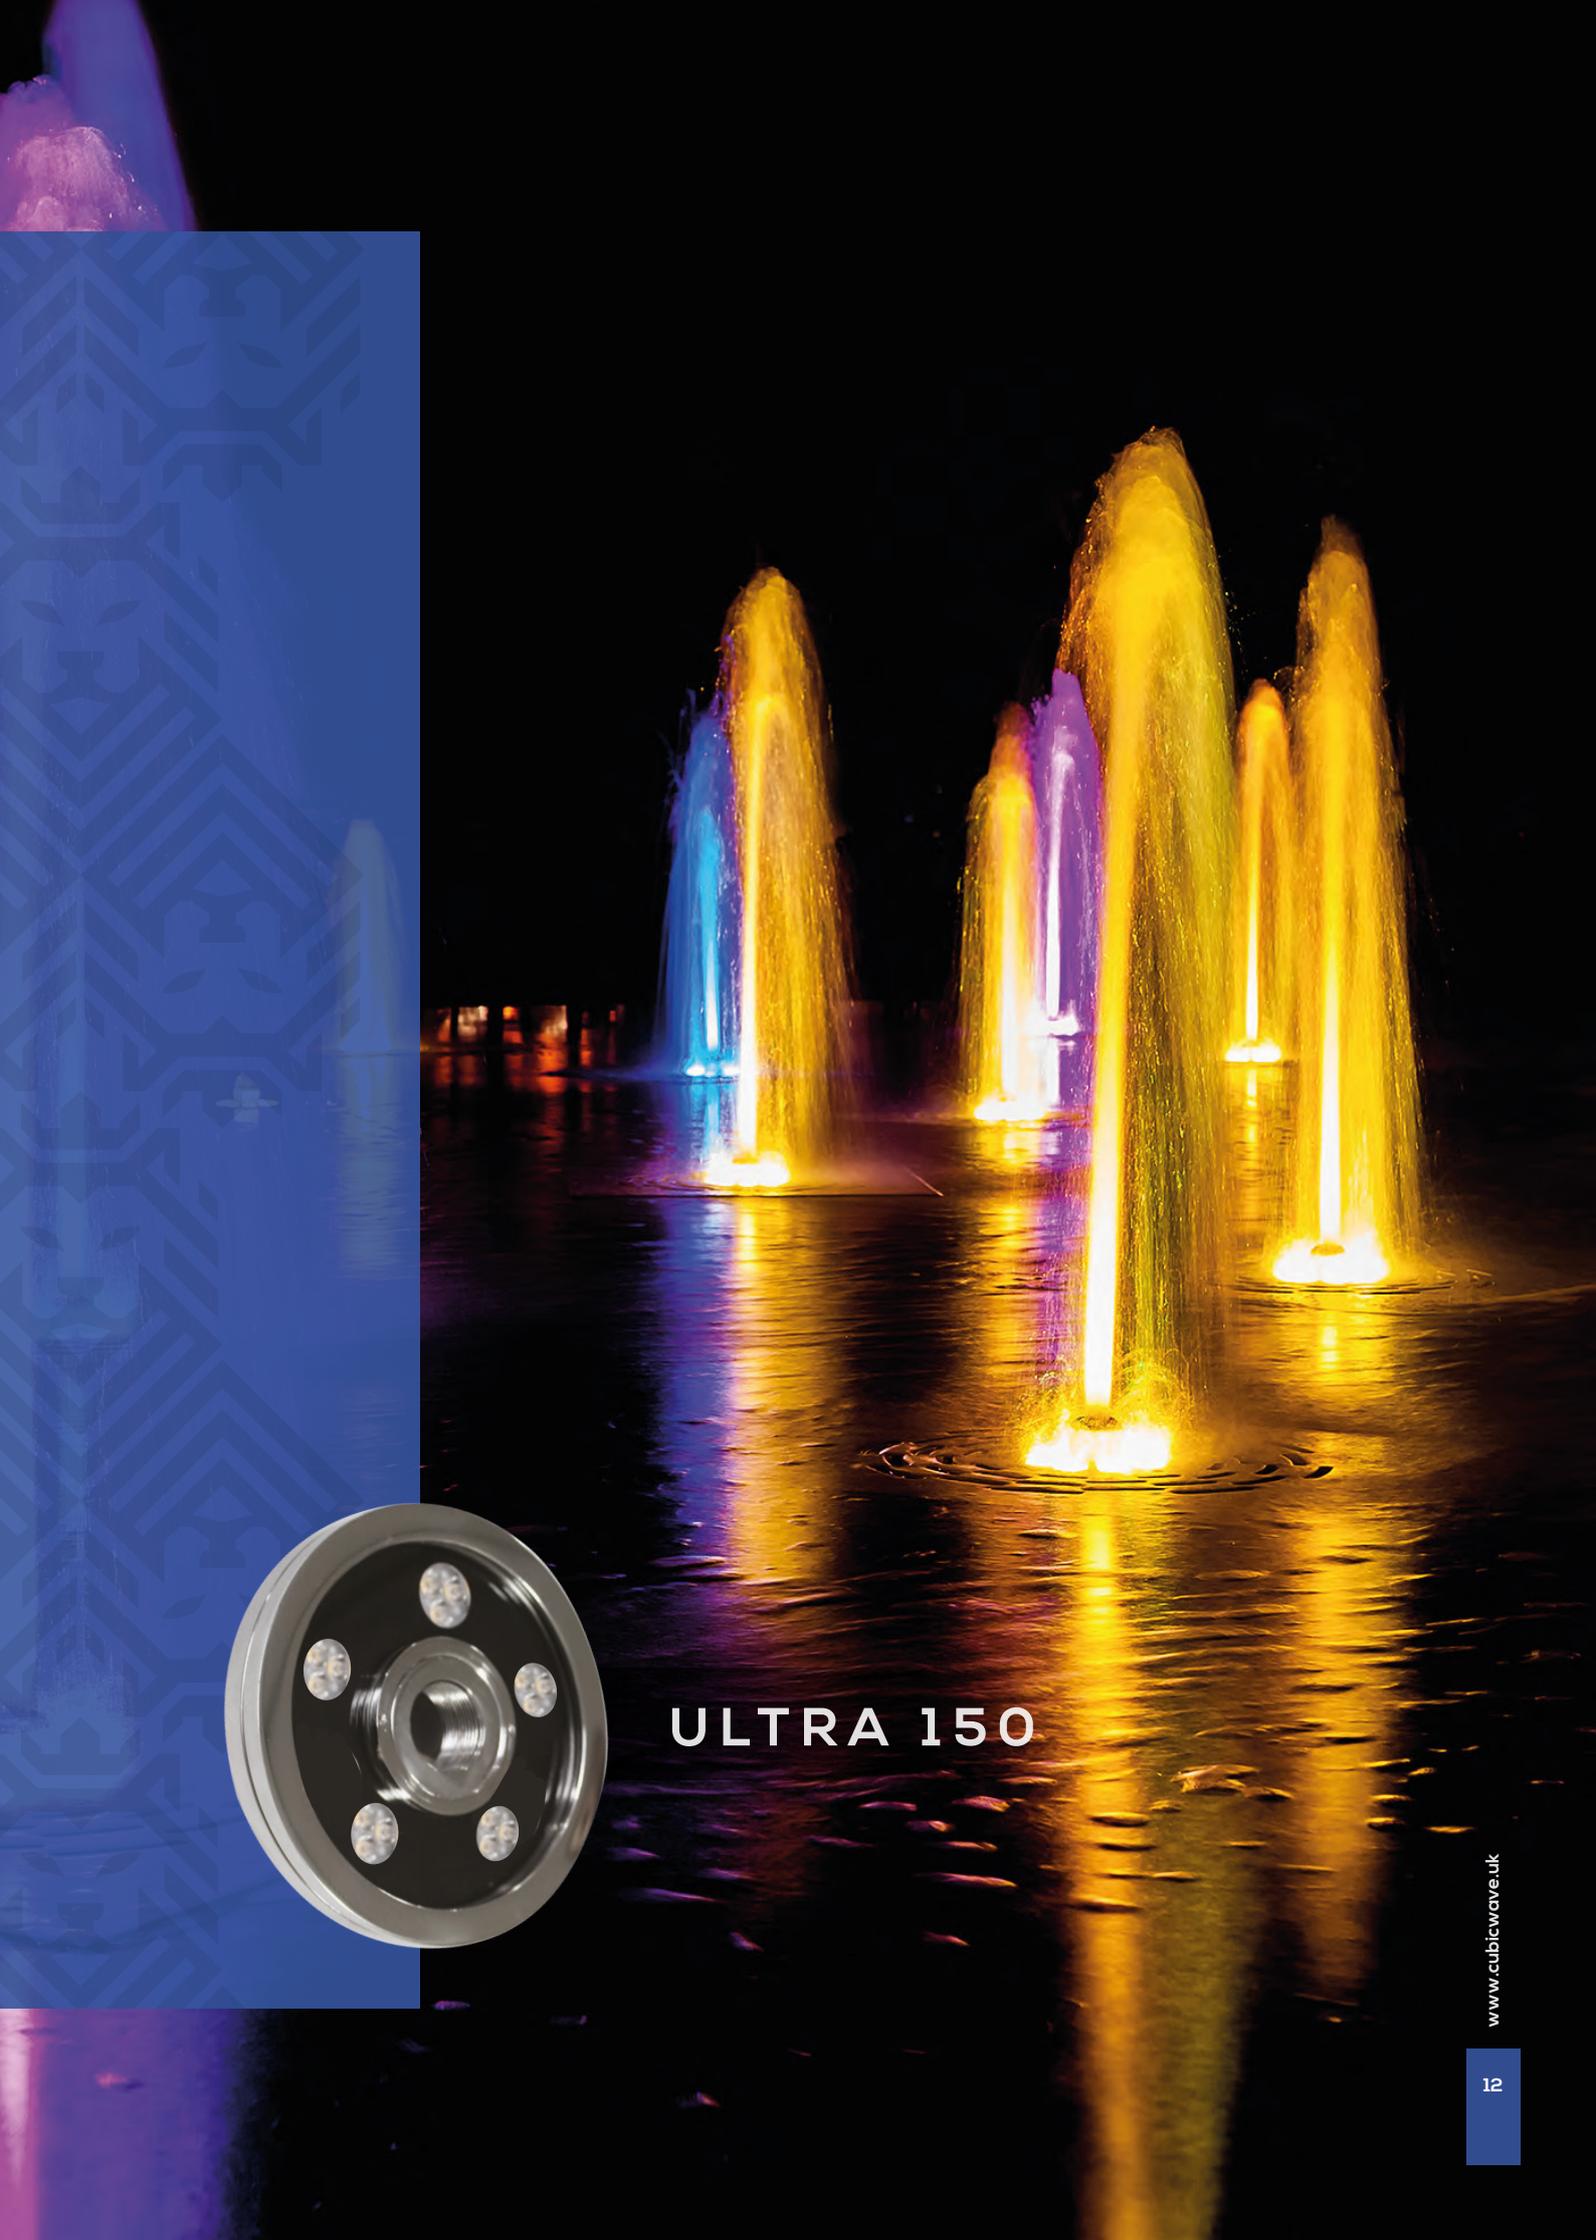

ULTRA 150






Lumen	1320 lm
Watt	22W
Voltage	12:24 V.D.C

602004


BLUE



Lumen	2090 lm
Watt	22 W
Voltage	12:24 V.D.C

602005

ROYAL BLUE



Lumen	1100 lm
Watt	22 W
Voltage	12:24 V.D.C

602006


RGB



Lumen	warm white : 732 lm
Watt	24 W
Voltage	12:24 V.D.C

602007


RGB-WW



Lumen	natural white: 822
Watt	24 W
Voltage	12:24 V.D.C

602008

RGB-NW



Lumen	cold white: 822
Watt	24 W
Voltage	12:24 V.D.C

602009

RGB-W



MONO ILLUMINATION

VIVID ILLUMINATION



ULTRA 150

PROTECTION SYSTEM

- Reverse Polarity protection .
- Over current protection .
- Over voltage protection .
- Short circuit LED protection .
- Open circuit LED protection .
- Thermal shutdown protection .